

TOMCO Pneumatic SINGLE SHUT-OFF

1/4" BASIC SIZE


Working Range:
Maximum Operating Pressure;
To 150 psig
Temperature: -40° to +225° F
Pressure Drop:
Inlet 5 psig 10 psig
100 psig 25 scfm 34 scfm

FEMALE THREAD	Catalog No.
1/4" NPSF	UC2-16

MALE THREAD	Catalog No.
1/4" NPTF	UC2-15
3/8" NPTF	UC2-20

UNIVERSAL SERIES

ARO, TRU-FLATE, INDUSTRIAL INTERCHANGE

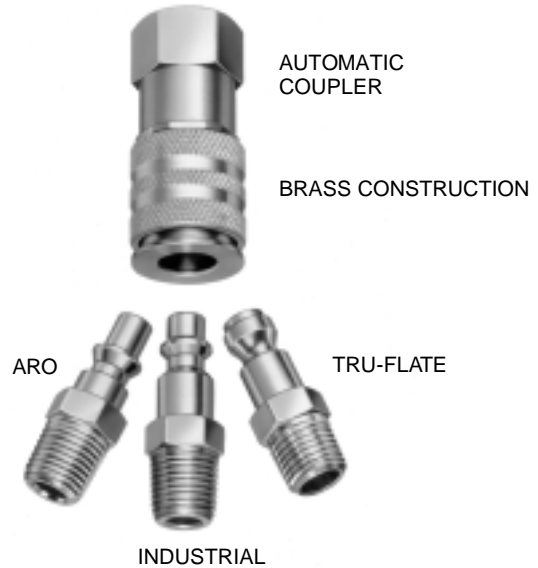

TOMCO Pneumatic SINGLE SHUT-OFF OR STRAIGHT THROUGH

1/8" BASIC SIZE

Working Range:
Maximum Operating Pressure;
To 250 psig
Temperature: -40° to +225° F
Pressure Drop:
Inlet 5 psig 10 psig
100 psig 16 scfm 23 scfm

SERIES SC

RECTUS SERIES 21 INTERCHANGE

MAX ACROSS FLATS ONLY 5/8"



FEMALE THREAD	Catalog No.	Catalog No.
1/8" NPTF 1/4" NPTF	<u>STEEL</u> SCP-11	<u>BRASS (valved)</u> <u>BRASS (Straight Through)</u> SCC-11B SCC-11BLV
	SCP-16	SCC-16B SCC-16BLV

MALE THREAD	Catalog No.	Catalog No.
1/8" NPTF 1/4" NPTF	<u>STEEL</u> SCP-10	<u>BRASS (valved)</u> <u>BRASS (Straight Through)</u> SCC-10B SCC-10BLV
	SCP-15	SCC-15B SCC-15BLV